


## CHARGING INSTRUCTIONS - W'LATED SYSTEMS ONLY

IF HEAD PRESSURE IS BELOW 225\* BEGIN WITH STEP 1.  
 IF HEAD PRESSURE IS ABOVE 225\* BEGIN WITH STEP 2.


**STEP 1.** BLOCK CONDENSER COIL WITH CARDBOARD  
 TO RAISE HEAD PRESSURE TO 225\*.



**STEP 2.**

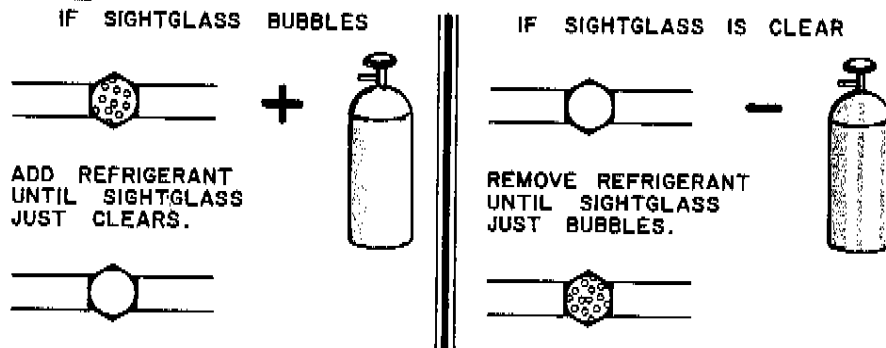

**STEP 3.** PLACE REFRIGERANT CYLINDER ON SCALE.

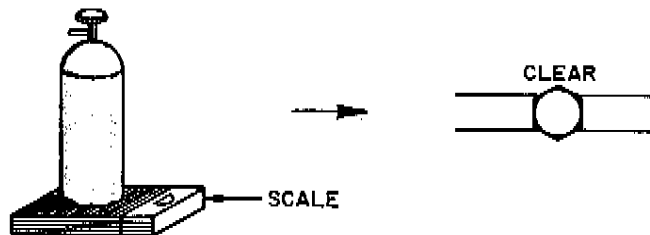

THEN ADD \_\_\_\_\_ LBS. BY WEIGHT

**DON'T GUESS**

WHEN CHARGE IS ADDED, SIGHTGLASS SHOULD BE CLEAR. THE SYSTEM IS NOW CORRECTLY CHARGED FOR WINTER OPERATION.

IF A SYSTEM HAS TO BE RECHARGED FOLLOW THIS SAME PROCEDURE.

KRAMER TRENTON CO. TRENTON, N. J.

LABEL # 305 - A